



HANDSET TYPE 46

A robust handset constructed from flame retardant material fitted with a stainless steel armoured or curly cable that can be customised to suit many applications where durability is essential.

- Robust and reliable
- Vandal resistant
- Customised handset specification
- Flame retardant construction
- Cable terminations to meet customer requirements
- Stainless steel armoured cable
- Durable polyurethane curly cord for flexibility
- Press To Talk (PTT) switch option
- Noise cancelling (NC) handset available

Handset 46 offers the best solution for a reliable handset which is vandal-resistant, robust and meets all your requirements.

HANDSET SPECIFICATION

- Manufactured from flame retardant ABS/PC blend
- Fitted with a double clinched stainless steel armour or curly cable
- Customised specification to meet all requirements
- Various cable terminations to meet all requirements
- PTFE conductor wires meeting URL regulations
- Acoustic parameters to customised specification
- Single pole momentary switch sealed to IP67
- Handset weight 575 grams
- Length 210mm, width 53mm
- ESD protected to 2.2KV
- High power magnet fitted for reed relay operation




OPTION A
Stainless steel armoured
cable or curly cord



OPTION B
PTT Switch



OPTION C
Noise cancelling

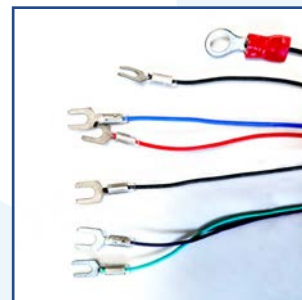


OPTION D
Various cable terminations



HANDSET TYPE 46

CRADLE SPECIFICATION

- Designed for use with Handset 46
- Manufactured from flame retardant ABS/PC blend
- Hook mechanism from durable nylon
- Spring fitted in accordance to vibration requirement as set out in RAI 20 section 6
- Length 250mm, width 70mm
- Mounting pitch of holes 121mm [As current standard]
- Optional centrally mounted hook switch

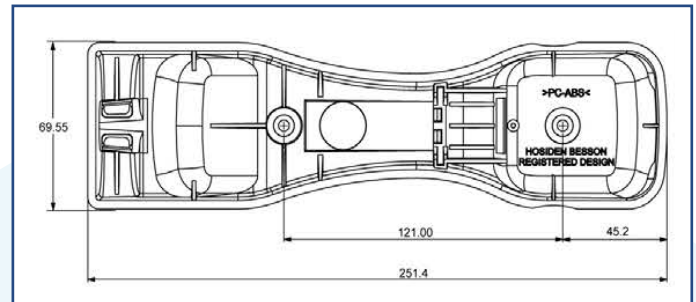

Cradle installation

HANG-UP HOOK SPECIFICATION


- Fitting includes Taptite fixing screws
- Robust design
- Single and dual reed relay hook switch options




Latched cradle with hook switch




Hang-up hook

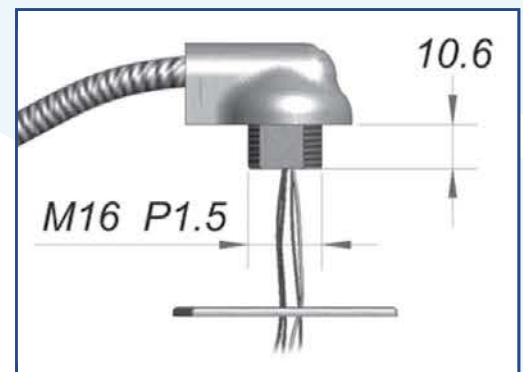

Elbow detail

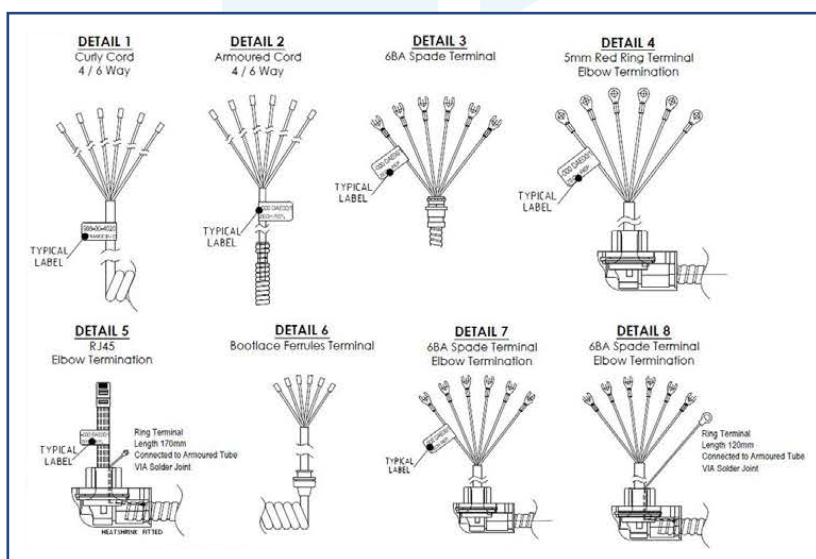

Complete termination details

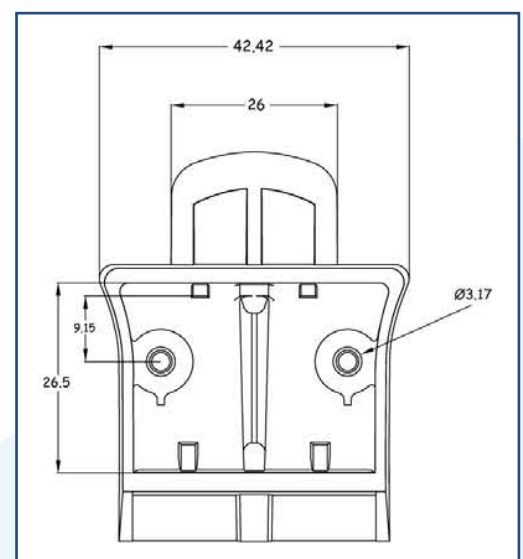

Hang-up hook detail